arXiv:1201.5109v1 [physics.optics] 24 Jan 2012

A reinterpretation of the metamaterial perfect absorber

Yong Zeng,[1] **Hou-Tong Chen,**[2] **and Diego A. R. Dalvit**[1]

[1] *Theoretical Division, MS B213, Los Alamos National Laboratory, Los Alamos, New Mexico 87545, USA*
[2] *MPA-CINT, MS K771, Los Alamos National Laboratory, Los Alamos, New Mexico 87545, USA*

Compiled January 25, 2012

We analytically prove that the appearance of *two almost, but not exactly out-of-phase currents* inside a metamaterial is necessary for a perfect absorber. We further show that although evanescent waves do not contribute to far fields scattered by the perfect absorber, they however must consume the electromagnetic energy significantly. © 2012 Optical Society of America

OCIS codes: 160.3918, 250.5403

In 2008, Landy *et al.* experimentally demonstrated that a metamaterial consisting of three thin metal-dielectric-metal layers can almost entirely absorb an electromagnetic (EM) wave at particular frequencies, which they called the metamaterial perfect absorber (MPA) [1]. The same group [1–4] also addressed the underlying mechanisms of the MPA by using the popular effective bulk permittivities and permeabilities employed in the metamaterial community [5]. It was found that the retrieved effective permeability can be described by a Lorentzian function around the designed frequency, indicating the appearance of a magnetic resonance [4]. This observation was further supported by full-wave simulations which showed the currents in the two metallic layers form a circulating current loop [3].

Recently, Chen *et al.* proposed a different interpretation [6, 7]. They noticed that there are two interfaces inside a three-layer metamaterial, and EM waves are scattered and reflected by these discontinuities. It is therefore natural to treat these layers separately and further take into account multiple reflections inside the metamaterial [8,9]. By treating each metallic layer as a metasurface with effective surface electric and magnetic susceptibilities [10], their model can provide almost identical spectra as that obtained by full-wave simulations. Furthermore, the currents in the two metallic layers were observed to have almost equal amplitude and to be nearly out-of-phase [7].

In this paper, we reinvestigate the underlying physics of MPAs by studying their polarization currents. We find that MPAs possess not only a magnetic dipole but also an electric dipole and quadrupole as well. These multipoles are destructive along the reflected direction and constructive along the transmitted direction but out-of-phase with the external incident wave. We further show that non-zero-order Bragg waves are crucial for the EM energy consumption.

Let us consider a metamaterial membrane, surrounded by vacuum, which is periodic in the xy plane. For simplicity, we assume its metaatoms are arranged in a rectangle lattice with primitive lattice vectors $d_x\mathbf{e}_x$ and $d_y\mathbf{e}_y$. Here d_x and d_y are the corresponding lattice constants. We further assume that the external illumination is a plane wave propagating along the z direction with a wave vector $\mathbf{k}^i$. Under this external excitation polarization currents, $\mathbf{J}(\mathbf{r},\omega) = -i\omega\epsilon_0[\epsilon(\mathbf{r},\omega)-1]\mathbf{E}(\mathbf{r},\omega)$, will appear inside the metamaterial, where $\epsilon(\mathbf{r},\omega)$ represents the permittivity of the metamaterial. Using the free space Green's function, we can express the scattered field in terms of the current

$$\mathbf{E}(\mathbf{r}',\omega) = \sum_{mn} \frac{-\pi Z_0 e^{i\mathbf{k}_{mn}\cdot\mathbf{r}'}}{d_x d_y \lambda \kappa_{mn}} \int d\mathbf{r}\mathbf{J}_{mn,\perp}(\mathbf{r},\omega)e^{-i\mathbf{k}_{mn}\cdot\mathbf{r}},$$

where the integration is performed over one unit cell, $Z_0 = \sqrt{\mu_0/\epsilon_0}$ is the free-space intrinsic impedance, λ is the excitation wavelength, and $k_0 = 2\pi/\lambda$ is the free-space wave number. The wave vector $\mathbf{k}_{mn}$ is defined as $\mathbf{k}_{mn} = \mathbf{k}^i_\parallel - \mathbf{g}_{mn} \pm \kappa_{mn}\mathbf{e}_z$ with $\kappa_{mn} = \sqrt{k_0^2 - |\mathbf{k}_{mn,\parallel}|^2}$, and $\mathbf{g}_{mn} = (2\pi m/d_x)\mathbf{e}_x + (2\pi n/d_y)\mathbf{e}_y$ being the reciprocal wave vectors, and $\mathbf{k}^i_\parallel$ being the projection of the incident wave vector onto the xy plane. Here the positive sign corresponds to forward scattering (propagating along the positive z direction), and the negative sign corresponds to backward scattering (propagating along the negative z direction). Moreover, $\mathbf{J}_{mn,\perp} = \mathbf{J} - \mathbf{k}_{mn}(\mathbf{k}_{mn}\cdot\mathbf{J})/k_0^2$. Consequently all orders of scattered waves are transverse. Under certain circumstances, only the zero order waves can survive in the far zone. The forward wave is then given by

$$\mathbf{E}^f_{00}(\mathbf{r}',\omega) = \frac{-\pi Z_0}{d_x d_y \lambda k^i_z} e^{i\mathbf{k}^i\cdot\mathbf{r}'} \int d\mathbf{r}\mathbf{J}_{00,\perp}(\mathbf{r},\omega)e^{-i\mathbf{k}^i\cdot\mathbf{r}}.$$

The backward wave bears a similar expression except that $\mathbf{k}^i$ is replaced with $\mathbf{k}^i_\parallel - k^i_z\mathbf{e}_z$. This equation suggests that the tangential component of the incident wave vector is conserved.

We now apply these equations to the metamaterial perfect absorber. The most studied MPA is the one proposed in Ref. [4] (depicted schematically in Fig. 1), which consists of three thin layers. The first layer is a perforated metallic membrane which is referred to as the cross layer. The second layer, called the spacer layer, is filled with a homogeneous dielectric medium with weak absorption, and the last layer is generally a metallic ground plane.

Furthermore, the meta-atoms of the cross layer are arranged periodically in a square lattice. The whole structure possesses both x and y mirror symmetries. Under normal incidence $\mathbf{E}^i = e^{ik_0 z'}\mathbf{e}_x$, we know by symmetry that E_x is an even function of x, while E_y and E_z are odd functions of x. Furthermore, the lattice constant d is far smaller than the incident wavelength, so that only the zero-order waves survive in the far zone. The forward and backward scattered fields are hence given by

$$\mathbf{E}^f(\mathbf{r}', \omega) = -\frac{Z_0 \mathbf{e}_x}{2} e^{ik_0 z'} \int_{-h/2}^{h/2} g(z,\omega) e^{-ik_0 z} dz,$$

$$\mathbf{E}^b(\mathbf{r}', \omega) = -\frac{Z_0 \mathbf{e}_x}{2} e^{-ik_0 z'} \int_{-h/2}^{h/2} g(z,\omega) e^{ik_0 z} dz.$$

Here h is the thickness of the MPA, and the integral function

$$g(z,\omega) = \frac{1}{d^2} \int_{-d/2}^{d/2} \int_{-d/2}^{d/2} J_x(x,y,z,\omega) dx dy \qquad (1)$$

stands for the current density at a specific z plane. Note that J_y does not contribute because of its symmetry. As a direct result, the reflected wave is $\mathbf{E}^b$, and the transmitted wave is $\mathbf{E}^i + \mathbf{E}^f$.

A metamaterial with unity absorption neither reflects nor transmits the incident EM wave, which is equivalent to requiring

$$\int_{-h/2}^{h/2} g(z) e^{ik_0 z} dz = 0, \qquad (2)$$

$$\int_{-h/2}^{h/2} g(z) e^{-ik_0 z} dz = \frac{2}{Z_0}. \qquad (3)$$

To simplify the notation, we dropped the ω dependence of g here and in the following. The first equation imposes no reflection, and the second one leads to zero transmission. Because the thickness h is much smaller than λ, we can employ multipolar analysis by expanding $e^{ik_0 z}$ as $1 + ik_0 z + \cdots$. The leading order gives the electric dipole and the first order of $k_0 z$ gives the combination of magnetic dipole and electric quadrupole. Supposing these three multipoles dominate the above two integrations, we arrive at

$$\int_{-h/2}^{h/2} g_R(z) dz = \frac{1}{Z_0}, \quad \int_{-h/2}^{h/2} g_I(z) dz = 0, \qquad (4)$$

as well as

$$\int_{-h/2}^{h/2} g_R(z) z dz = 0, \quad k_0 \int_{-h/2}^{h/2} g_I(z) z dz = \frac{1}{Z_0}, \qquad (5)$$

where g_R and g_I are the real and imaginary parts of g, respectively. Eqs. (4) immediately suggest that there exists an electric dipole moment with a value of $1/Z_0$, and Eqs. (5) imply that the MPA possesses a magnetic dipole as well as an electric quadrupole, and their sum equals i/Z_0 (see Eq. (9.31) of Ref. [11]). Moreover, as suggested by Eqs. (2) and (3), these three multipoles are destructive along the reflected direction, which leads to zero reflectance. They, however, are constructive along the transmitted direction but out-of-phase with the external incidence so that the transmittance is also zero.

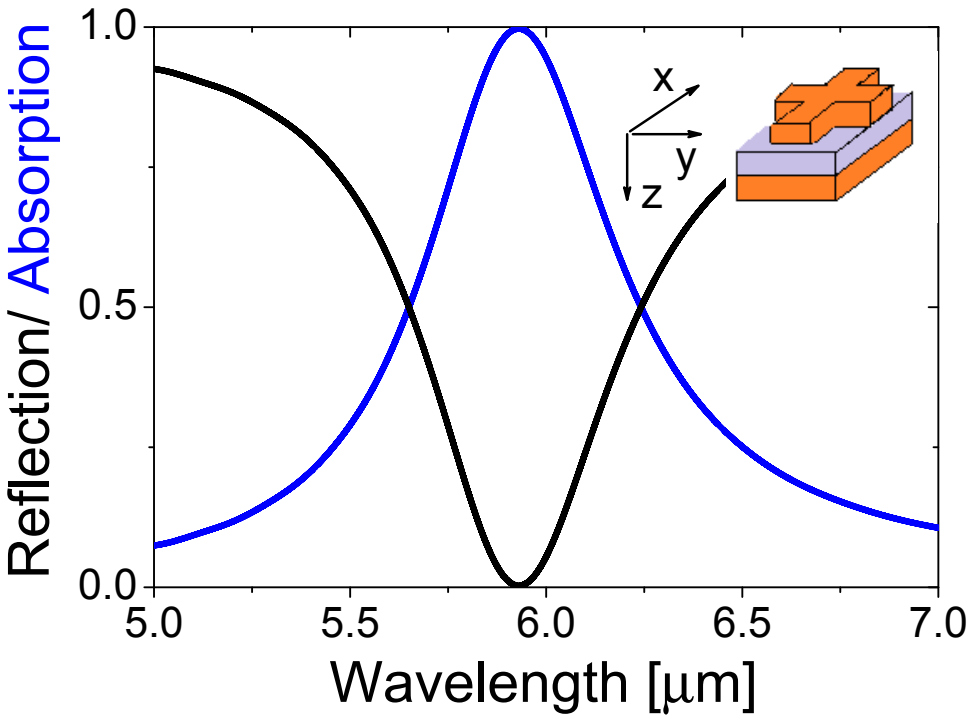

Fig. 1. Reflection and absorption spectra of the metamaterial perfect absorber. The inset shows the geometry of the metamaterial. The metallic cross consists of two 0.4×1.7 metallic bars. The thicknesses of the cross, spacer and ground layer are 0.1, 0.09 and 0.2, respectively. The total thickness h equals 0.39, and the lattice constant $d = 2$. All dimensions are in micrometers.

It is important to notice that the dielectric layer generally has a permittivity ϵ_d which is very different from the permittivity ϵ_m of the metallic layers. For instance, the ratio $(\epsilon_m - 1)/(\epsilon_d - 1)$ of the MPA studied below is about $1428e^{i0.94\pi}$ when $\lambda = 5.93\mu$m. Since E_x is continuous crossing the spacer-ground interface, the polarization current J_x is strongly concentrated inside the metallic layers. We therefore can neglect the polarization current within the dielectric layer. Denoting the total current of the cross and ground layer as G_c and G_g, respectively, Eqs. (4) suggest

$$Z_0 \times \mathrm{Re}(G_c + G_g) = 1, \quad \mathrm{Im}(G_c + G_g) = 0. \qquad (6)$$

In addition, Eqs. (5) imply $|g_I|$ is much bigger than $|g_R|$ because $k_0|z| \ll 1$. We therefore expect that G_c and G_g are nearly purely imaginary. In other words, the currents in the two metallic layers are almost, *but not exactly*, out of phase. This fact, here proved analytically, was reported in earlier numerical simulations [1–4, 12].

To support the statements above, let us consider a MPA whose geometrical and optical parameters are almost identical to the ones used in Ref. [4]; our geometrical parameters are specified in Fig. 1. The permittivity of the dielectric is described by a Lorentz model, $\epsilon_d(\omega) = \epsilon_\infty \left[1 + \omega_p^2/(\omega_0^2 - \omega^2 - i\omega\gamma)\right]$ with $\epsilon_\infty = 2.24$, $\omega_p = 93.77$ THz, $\gamma = 173.73$ THz and $\omega_0 = 3.1$ THz [13]. The permittivity of the metal is described by a Drude model, $\epsilon_m(\omega) = 1 - \omega_{pm}^2/(\omega^2 + i\omega\gamma_m)$, with $\omega_{pm} = 1.37 \times 10^4$ THz and $\gamma_m = 40.8$ THz. Using a finite-difference time-domain method [14], where the size of spatial grid cell is fixed at 5 nm, we calculate the

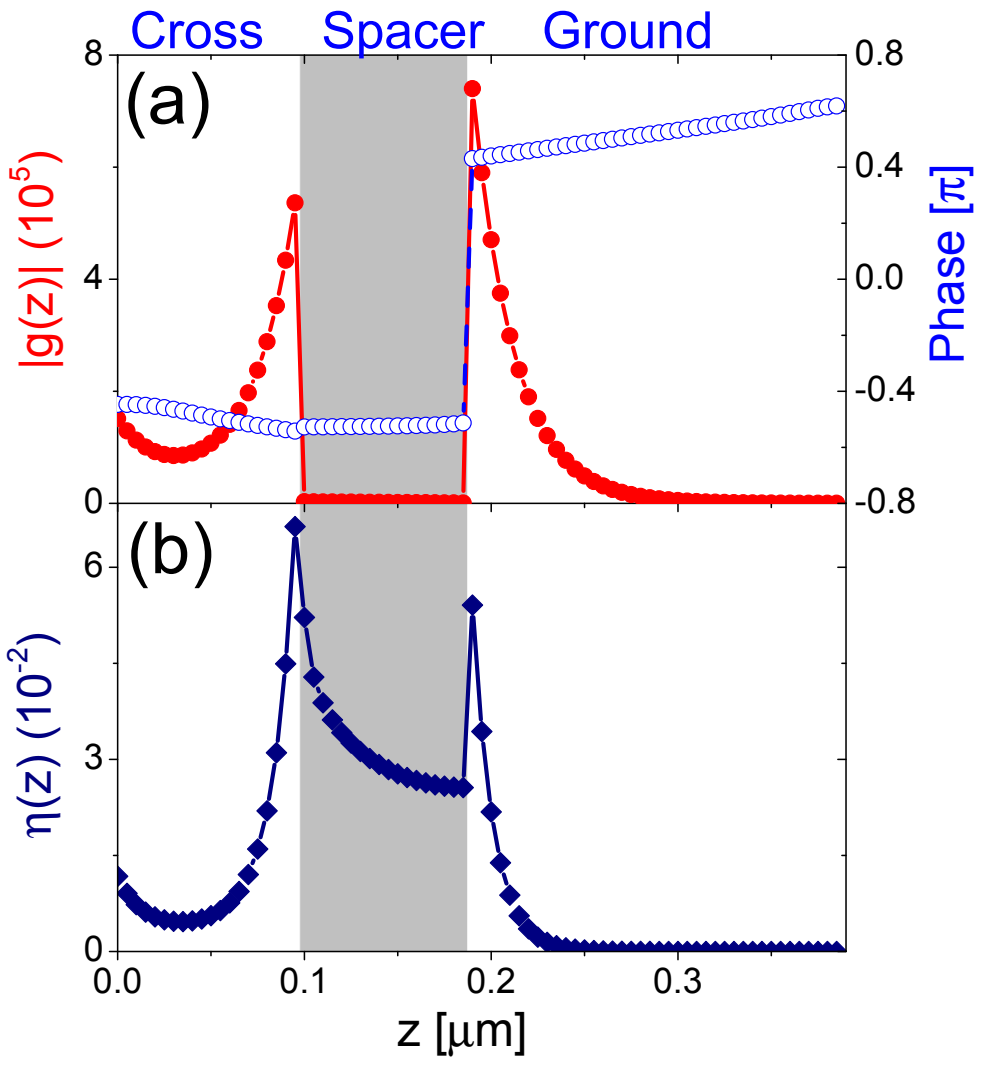

Fig. 2. (a) Amplitude and phase of the function $g(z)$, and (b) the function $\eta(z)$, when $\lambda = 5.93\mu$m. The dielectric layer is highlighted.

linear spectra and plot the results in Fig. 1. Around a wavelength of 5.93 μm, the absorption is found to be nearly 100%. We further calculate the current function $g(z)$ at this wavelength and plot the result in Fig. 2(a). To check our numerical results, we computed the integrations in Eqs. (4) and (5), and verified that they are nearly identically satisfied. As discussed above, we find that the polarization current is strongly localized inside the two metallic layers, and a phase jump of 0.94π appears at the spacer-ground interface. Furthermore, we obtain $G_c Z_0 = (-0.15 - 6.77i)$ and $G_g Z_0 = (1.1 + 6.78i)$, in perfect agreement with the discussions above.

Next we consider the dissipation of the electromagnetic energy within the MPA. According to Poynting's theorem, the energy absorption can be described by $\mathbf{J} \cdot \mathbf{E}$ [11]. Consequently we define

$$\eta(z) = \frac{\int\int \mathrm{Im}(\epsilon)|\mathbf{E}(x,y,z)|^2 dxdy}{\int\int\int \mathrm{Im}(\epsilon)|\mathbf{E}(x,y,z)|^2 dxdydz} \tag{7}$$

to measure the relative contribution from a specific z plane. Here $\epsilon = \epsilon(\mathbf{r}, \omega)$ describes the permittivity of the whole MPA structure. The result is plotted in Fig. 2(b). It is surprising to observe that only a feeble discontinuity appears around the spacer-ground interface. Because of the structural periodicity, we can express the electric field as a superposition of Bragg waves. Under normal incidence, the zero-order mode, with $m = 0$ and $n = 0$, represents a plane wave propagating along the z direction. Since the longitudinal z component is absent, this mode must be continuous across the spacer-ground interface. We therefore expect that η of the spacer layer is much smaller than that of the ground layer because $\mathrm{Im}(\epsilon_m)/\mathrm{Im}(\epsilon_d) \approx 3000$, which obviously disagrees with our numerical result. This contradiction suggests that higher-order Bragg waves or the longitudinal fields contribute significantly to the energy dissipation. Indeed, we find that the ratio of $|E_z/E|$ inside the spacer layer ranges from 0.84 to nearly 1.0. This property may have many important applications. For example, it may significantly improve optical coupling in quantum well infrared photodetectors [15]. By integrating η in each sublayer, we further find that the relative contributions from the cross, spacer and ground layer are 28.5%, 56.7% and 14.8%, respectively. Therefore, the dielectric and the metal consume EM energy almost equally.

To sum up, we studied the metamaterial perfect absorber in terms of its polarization current. It is analytically proved that there always exists one circulating current loop, together with an electric dipole as well as an electric quadrupole. It is the interference among them and the external incident wave that results in unity absorption. We further showed that longitudinal fields contribute significantly to the dissipation of the electromagnetic energy within the perfect absorber.

We acknowledge support from the LANL LDRD program.

References

1. N. I. Landy, S. Sajuyigbe, J. J. Mock, D. R. Smith, and W. J. Padilla, Phys. Rev. Lett. 100, 207402 (2008).
2. H. Tao, C. M. Bingham, A. C. Strikwerda, D. Pilon, D. Shrekenhamer, N. I. Landy, K. Fan, X. Zhang, W. J. Padilla, and R. D. Averitt, Phys. Rev. B 78, 241103(R) (2008).
3. H. Tao, N. I. Landy, C. M. Bingham, X. Zhang, R. D. Averitt, and W. J. Padilla, Opt. Express 16, 7181 (2008).
4. X. Liu, T. Starr, A. F. Starr, and W. J. Padilla, Phys. Rev. Lett. 104, 207403 (2010).
5. D. R. Smith, S. Schultz, P. Marko, and C. M. Soukoulis, Phys. Rev. B 65, 195104 (2002).
6. J. Zhou, H.-T. Chen, T. Koschny, A. K. Azad, A. J. Taylor, C. M. Soukoulis, and J. F. O'Hara, arXiv:1111.0343v1.
7. H.-T. Chen, arXiv:1112.5168.
8. H.-T. Chen, J. Zhou, J. F. O'Hara, F. Chen, A. K. Azad, and A. J. Taylor, Phys. Rev. Lett. 105, 073901 (2010).
9. D. Yu. Shchegolkov, A. K. Azad, J. F. O'Hara, and E. I. Simakov, Phys. Rev. B 82, 205117 (2010).
10. C. L. Holloway, A. Dienstfrey, E. F. Kuester, J. F. O'Hara, A. K. Azad, A. J. Taylor, Metamaterials 3, 100 (2009).
11. J. D. Jackson, *Classical Electrodynamics*, 3rd ed. (Wiley, New York, 1999).
12. Y. Ma, Q. Chen, J. Grant, S. C. Saha, A. Khalid, and D. R. S. Cumming, Opt. Lett. 36, 945 (2011).
13. Because our finite-difference time-domain approach cannot handle a permittivity with a nondispersive imaginary part, we adapt a dispersive Lorentz model for the dielectric.
14. A. Taflove and S. C. Hagness, *Computational Electrodynamics: The Finite-Difference Time-Domain Method*, 2nd Ed. (Artech House, Boston, 2000).
15. Y. Fu, M. Willander, W. Lu, and W. Xu, J. Appl. Phys. 84, 5750 (1998).

References

1. N. I. Landy, S. Sajuyigbe, J. J. Mock, D. R. Smith, and W. J. Padilla, “Perfect metamaterial absorber,” Phys. Rev. Lett. 100, 207402 (2008).
2. H. Tao, C. M. Bingham, A. C. Strikwerda, D. Pilon, D. Shrekenhamer, N. I. Landy, K. Fan, X. Zhang, W. J. Padilla, and R. D. Averitt, “Highly flexible wide angle of incidence terahertz metamaterial absorber: Design, fabrication, and characterization,” Phys. Rev. B 78, 241103(R) (2008).
3. H. Tao, N. I. Landy, C. M. Bingham, X. Zhang, R. D. Averitt, and W. J. Padilla, “A metamaterial absorber for the terahertz regime: Design, fabrication and characterization,” Opt. Express 16, 7181 (2008).
4. X. Liu, T. Starr, A. F. Starr, and W. J. Padilla, “Infrared spatial and frequency selective metamaterial with near-unity absorbance,” Phys. Rev. Lett. 104, 207403 (2010).
5. D. R. Smith, S. Schultz, P. Marko, and C. M. Soukoulis, “Determination of effective permittivity and permeability of metamaterials from reflection and transmission coefficients,” Phys. Rev. B 65, 195104 (2002).
6. J. Zhou, H.-T. Chen, T. Koschny, A. K. Azad, A. J. Taylor, C. M. Soukoulis, and J. F. O’Hara, “Application of metasurface description for multilayered metamaterials and an alternative theory for metamaterial perfect absorber,” arXiv:1111.0343v1.
7. H.-T. Chen, “Interference theory of metamaterial perfect absorbers,” arXiv:1112.5168.
8. H.-T. Chen, J. Zhou, J. F. O’Hara, F. Chen, A. K. Azad, and A. J. Taylor, “Antireflection Coating Using Metamaterials and Identification of Its Mechanism,” Phys. Rev. Lett. 105, 073901 (2010).
9. D. Yu. Shchegolkov, A. K. Azad, J. F. O’Hara, and E. I. Simakov, “Perfect subwavelength fishnet-like metamaterial-based film terahertz absorbers,” Phys. Rev. B 82, 205117 (2010).
10. C. L. Holloway, A. Dienstfrey, E. F. Kuester, J. F. O’Hara, A. K. Azad, A. J. Taylor, “A discussion on the interpretation and characterization of metafilms/metasurfaces: The two-dimensional equivalent of metamaterials,” Metamaterials 3, 100 (2009).
11. J. D. Jackson, *Classical Electrodynamics*, 3rd ed. (Wiley, New York, 1999).
12. Y. Ma, Q. Chen, J. Grant, S. C. Saha, A. Khalid, and D. R. S. Cumming, “A terahertz polarization insensitive dual band metamaterial absorber,” Opt. Lett. 36, 945 (2011).
13. Because our finite-difference time-domain approach cannot handle a permittivity with a nondispersive imaginary part, we adapt a dispersive Lorentz model for the dielectric.
14. A. Taflove and S. C. Hagness, *Computational Electrodynamics: The Finite-Difference Time-Domain Method*, 2nd Ed. (Artech House, Boston, 2000).
15. Y. Fu, M. Willander, W. Lu, and W. Xu, “Optical coupling in quantum well infrared photodetector by diffraction grating,” J. Appl. Phys. 84, 5750 (1998).